


INDUSTRIAL

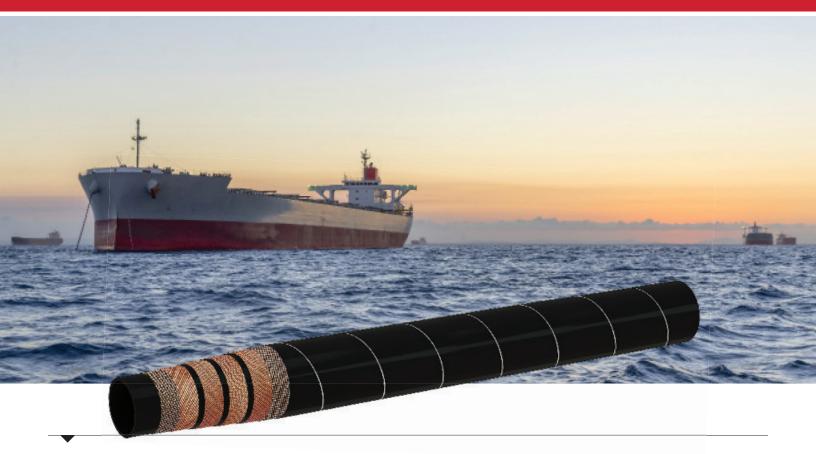

FLOATER HOSE

	0	(K 3)	
PART NUMBER	HOSE I.D. (IN.)	RATED W.P. (PSI) *	SAFETY FACTOR (RATIO)
	3, 4, 6, 8, 10	150	4:1
	3, 4, 6, 8	200	4:1
4100 Series	3, 4, 6, 8	225	4:1
4500 Series	3, 4, 6, 8	250	4:1
	3, 4, 6	300	4:1
	3, 4	350	4:1

*Available in other customizable combinations of working pressures and sizes.

Tube: Nitrile (NBR) | Oil & Fuel Resistant | Black

Reinforcement: Multiple Plies of Light-weight High-strength Textile Tire-cord

Cover: Neoprene | Oil, Weather & Abrasion Resistant | Black

Temperature: -40° F to +200° F

Lengths: Customizable up to 1000 Feet

Application: Discharging of petroleum products on marine terminals where dock facilities are not available.

Fittings: Swaged on couplings with flanges or connectors as required.

Construction (layers): Tube, Breaker Fabric, Tire-cord (show 4 layers), Breaker Fabric, Cover

ISO 9001:2015 CERTIFIED QUALITY SYSTEM API COMPLIANT QUALITY MANAGEMENT SYSTEM



PO BOX 310, LAPORTE, IN 46352-0310

P: 800-348-8868 // SALES@NRPJONES.COM

WWW.NRPJONES.COM



NRP Jones has what it takes to build your business. Over a half-century of experience helps you build customer satisfaction while increasing your sales and profits.

QUALITY

Pride and craftsmanship result in the quality products that you require.

Product reliability will live up to your expectations.

NRP Jones ISO 9001:2015 Registered.

SERVICE

Select from a wide range of hose and fitting products.

Orders are shipped from a large inventory.

You can count on prompt, knowledgeable, friendly help every time you call.

Your business is taken personally.

VALUE

NRP Jones offers competitive pricing.

Distributor programs are available to increase your sales and margins.

We'll Go to Great Lengths to Meet Your Needs