


FLOATER HOSE

FLOATER HOSE

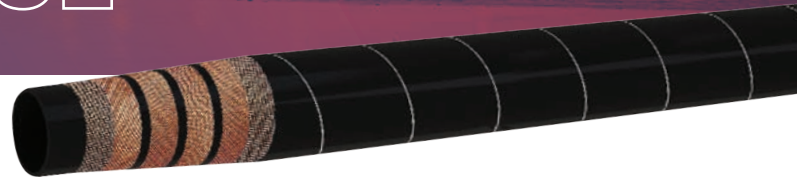

Tube: Nitrile (NBR) | Oil & Fuel Resistant | Black

Reinforcement: Multiple Plies of Light-weight High-strength Textile Tire-cord

Cover: Neoprene | Oil, Weather & Abrasion Resistant | Black

Temperature: -40° F to +200° F

Lengths: Customizable up to 1000 Feet

Application: Discharging of petroleum products on marine terminals where dock facilities are not available.

Fittings: Swaged on couplings with flanges or connectors as required.

Construction (layers): Tube, Breaker Fabric, Tire-cord (show 4 layers), Breaker Fabric, Cover

PART NUMBER	HOSE I.D. (IN.)	RATED W.P. (PSI)*	SAFETY FACTOR (RATIO)
4100 Series 4500 Series	3, 4, 6, 8, 10	150	4:1
	3, 4, 6, 8	200	4:1
	3, 4, 6, 8	225	4:1
	3, 4, 6, 8	250	4:1
	3, 4, 6	300	4:1
	3, 4	350	4:1

*Available in other customizable combinations of working pressures and sizes.

MADE IN THE USA

Corporate Office & Manufacturing:

302 Philadelphia Street
LaPorte, Indiana 46350
Customer Service Toll-Free Number 1-800-348-8868
Order Entry Toll-Free Fax Number 1-800-207-2221
Email sales@nrpjones.com

Manufacturing Facility:

255 West 11th North
Nephi, Utah 84648
Customer Service Toll-Free Number 1-800-453-1480
Order Entry Toll-Free Fax Number 1-800-207-2221
Email sales3@nrpjones.com

